



Western Systems



carmanah®

R820-G

CABINET-BASED CIRCULAR BEACON

Circular flashing crosswalk beacons improve pedestrian safety by increasing yield rates at unsignalized, marked crosswalks.

- The R820-G meets MUTCD requirements and is Buy America compliant
- Audible pushbutton or passive pedestrian activation
- Solar or AC-powered
- Energy Balance Report™ (EBR) prepared for every location to ensure battery longevity

SUPERIOR DESIGN AND TECHNOLOGY

The R820-G is a cabinet-based system with a separate, high-power solar panel. This design enables the R820-G to work with audible pushbutton stations, passive activation sensors, and remote monitoring, as well as operate at higher intensities and increased activations in challenging environments. MUTCD flash patterns, available ITE intensity, and multiple configurations enable the R820-G to handle all crosswalk applications.

EASY INSTALLATION

All components, including the battery or AC power supply, Energy Management System (EMS) and optional audible pushbutton controller are housed in a compact, lockable, purpose-built enclosure. It also incorporates a wire routing and termination system, and all components are wired at the factory for an efficient installation.

ADVANCED USER INTERFACE

The R820-G comes with an on-board user interface for quick configuration and status monitoring. It allows for simple in-the-field adjustment of flash pattern, duration, intensity, ambient auto adjust, night dimming, and many more. Settings are automatically sent wirelessly to all units in the system.

COMPATIBILITY

Compatible with the Carmanah R820-E, R820-F, and our RRFBs. Interchange solar and AC power models within the same application.

RELIABLE

Designed with Carmanah's industry-leading solar modeling tools to provide dependable year-after-year operation. We prepare an Energy Balance Report (EBR) for every location.

TRUSTED FOR 20+ YEARS

With thousands of installations, Carmanah's systems are the benchmark in traffic applications and other transportation applications worldwide.





Western Systems




carmanah®

R820-G


CABINET-BASED CIRCULAR BEACON

CABINET DIMENSIONS

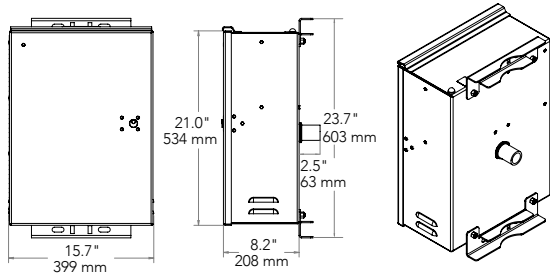

SOLAR PANEL MOUNTING

4.5" Diameter Round Top of Pole Mount Side of Pole Mount

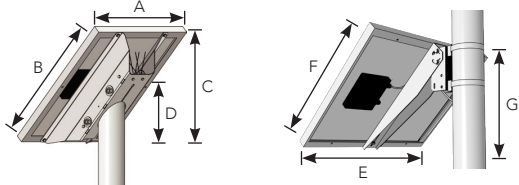


PANELS *	A	B	C	D	E	F	G
20 W	-	-	-	-	13.6" (345 mm)	18.5" (470 mm)	13.8" (350 mm)
50 W	21.2" (538 mm)	26.3" (668 mm)	19.6" (497 mm)	10.0" (254 mm)	26.3" (668 mm)	21.2" (538 mm)	16.0" (405 mm)
80 W	30.7" (780 mm)	26.5" (672 mm)	19.7" (500 mm)	10.0" (254 mm)	30.7" (780 mm)	26.5" (672 mm)	19.7" (500 mm)

* Carmanah will conduct a site assessment and provide an Energy Balance Report* to determine the correct solar panel and battery size.

BEACON MOUNTING

Dual Beacon

Quad Beacon

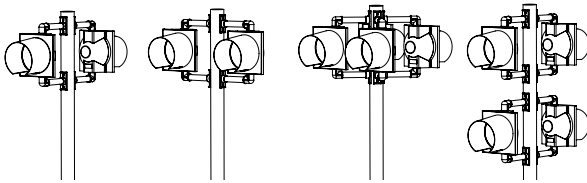

ACTIVATION OPTIONS

Standard Pushbutton Audible Pushbutton Station Passive Activation Sensor



BEACON SPECIFICATIONS

Optical	MUTCD compliant: 2009 MUTCD, Chapter 4L, Flashing Beacons, Manual on Uniform Traffic Control Devices (MUTCD)
	ITE VTCSH-LED Circular Signal Supplement compliant: meets ITE or 1.7x ITE intensity when used as recommended
	12 in (305 mm) or 8 in (203 mm) diameter LED modules, yellow
	High-power LEDs: +90% lumen maintenance (L90) based on IES LM-80
	Yellow, black, or green signal heads in UV-resistant polycarbonate or aluminum

SYSTEM SPECIFICATIONS

On-Board User Interface (OBUI)	Adjustable system settings with auto-scrolling LED display on our latest EMS
	System test, status, and fault detection: battery, solar, button, beacon, radio, day/night
	Flash patterns: RFB (WW+S), RFB1 (WW+S legacy), RFB2 (WSDOT), 0.5 sec. alternating (MUTCD), 0.5 sec. unison (MUTCD), 0.5 sec. x3 alternating (MUTCD), 0.1 sec. unison, 0.25 sec. unison, 0.1 sec. x3 quick flashes unison, 0.1 sec. x3 quick flashes alternating, steady on
	Input: momentary for pushbutton activation, normally open switch, normally closed switch
	Flash duration: 5 sec. to 1 hr.
	Intensity setting: 20 to 1400 mA for multiple circular beacons, RRFBs, or LED enhanced signs
	Nighttime dimming: 10 to 100% of daytime intensity
	Ambient Auto Adjust: increases intensity during bright daytime
	Automatic Light Control: reduces intensity if the battery is extremely low
	Temperature correction: yellow beacons
Beacon Communication	Calendar: internal time clock function
	Radio settings: enable/disable, selectable channel from 1 to 14
	Output: enabled when beacons flashing daytime and nighttime, or nighttime only E.g., for relay control of overhead lighting
	Activation counts and data reporting via OBUI or optional USB connection
	Encrypted, wireless radio with 2.4 GHz mesh technology
	Wireless update of settings from any unit to all systems on the same radio channel
	User-selectable multiple channels to group different beacons and ensure a robust wireless signal
	Communicates with all other Gen III radio-enabled systems including our R920-E, R920-F, and SC315 RRFBs
	Instantaneous wireless activation: <150 ms
	Wireless range: 1000 ft (305 m)
Power System	Integrated, vandal-proof antenna
	Solar or AC-powered
Energy Collection	AC: 100-240 VAC input, 6-14 AWG
	Replaceable AC-DC power supply, circuit breaker, terminal block wiring
Energy Storage	20, 50, or 80 W high-efficiency photovoltaic solar panel
	45 deg tilt for optimal energy collection
Cabinet Construction	Maximum Power Point Tracking with Temperature Compensation (MPPT-TC) battery charger for optimal energy collection in all solar and battery conditions
	12 V battery system with multiple sizes: 35, 55, 100 Ahr.
Environmental	Replaceable, recyclable, sealed, maintenance-free, best-in-class AGM batteries offer the widest temperature range and longest life
	Battery design life: +5 yrs.
Activation	Weatherproof, gasketed enclosure with vents for ambient air transfer (NEMA 3R)
	Lockable, hinged door with #2 lock
Warranty	Optional padlockable latch
	Corrosion-resistant aluminum with stainless steel hardware
Activation	Raw aluminum finish or yellow, black, or green powder coated
	Prewired to minimize installation time
Activation	High-efficiency optics and EMS = the most compact, lightweight system
	-40 to 165° F (-40 to 74° C) system operating temperature
Activation	-40 to 162° F (-40 to 72° C) battery operating temperature
	150 mph (241 kph) wind speed as per AASHTO LTS-6
Activation	Pushbutton: ADA-compliant, piezo-driven with visual LED and two-tone audible confirmation
	Audible pushbutton station: ADA-compliant, piezo-driven with visual LED and customizable voice message confirmation
Activation	Passive activation: microwave-based sensor detects pedestrian
	Passive activation: microwave-based sensor detects pedestrian



Specifications subject to local environmental conditions, and may be subject to change. All Carmanah products are manufactured in facilities that are certified to ISO quality standards. "Carmanah" and Carmanah logo are trademarks of Carmanah Technologies Corp. © 2020, Carmanah Technologies Corp. Document: SPEC_TRA_R920-F_RevB